


Unique Solutions to Tough Challenges

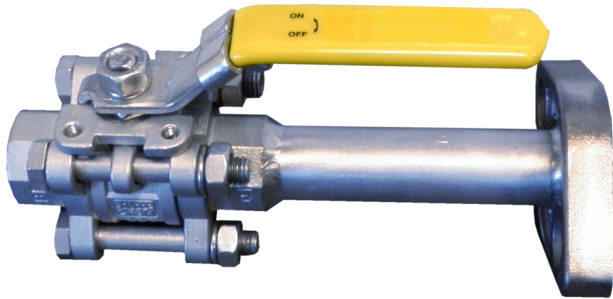

FEATURES:

- All welded construction
- Available in different materials
- Full Ported Ball Valve with locking handle
- Standard ANSI MAG 2 bolt adapter flange
- Note: Also available with lap joint end for 360 degree adjustment of assembly position to pump

PARTS INFORMATION		
ITEM	PART	MATERIAL
VALVE		316 SS
SEALS		PTFE
ADAPTER FLANGE		SS
PIPE SPOOL		SS

SPECIFICATIONS:

- 150 pound construction
- SCHD 40 through 160 pipe spools
- 1/2" Full ported Ball Valve Typical
- Minimum length determined by valve handle clearance

ANSIMAG® is a registered trademark of Sundyne Corporation